



ROUND FLOOR FIRST FLOOR

CAMDEN 29



AREAS:					
GROUND FLOOR:	98.4 m²	GARAGE:	36.8 m ²		
FIRST FLOOR:	124.6 m ²	ALFRESCO:	8.7 m ²		
	0.0 m ²	PORCH:	3.0 m ²		
	0.0 m ²		0.0 m ²		
SUB TOTAL:	223.1 m ²	TOTAL:	271.5 m ²		
	24.0 sq		29.2 sq		

Total House Length	14.8 m
Total House Width	11.3 m
Minimum Block Size*	13.1 x 21.8 m

NCC 2022 SUITABLE




This Brochure is for marketing purposes and should be used as a guide on Verve specification shown, please refer to your contract specifications speak to your New Home Consultant for full inclusion details.


"Suggested minimum block sizes are based on a 4m front setback and 3m ear setback for New Estate Builds. Your selected block setbacks may diffe rom this. Speak to your New Home Consultant to confirm if this product i suitable for your blocks individual requirements.

Sienna Building Pty Ltd. - ABN 66 128 617 532 owns Copyright of this design any reproduction in whole of part without consent is forbidden-Sienna Building Pty Ltd reserves the right to amend product design, specifications and pricing without notice.

ISSUE DATE: APRIL 2023

www.siennahomes.com.au

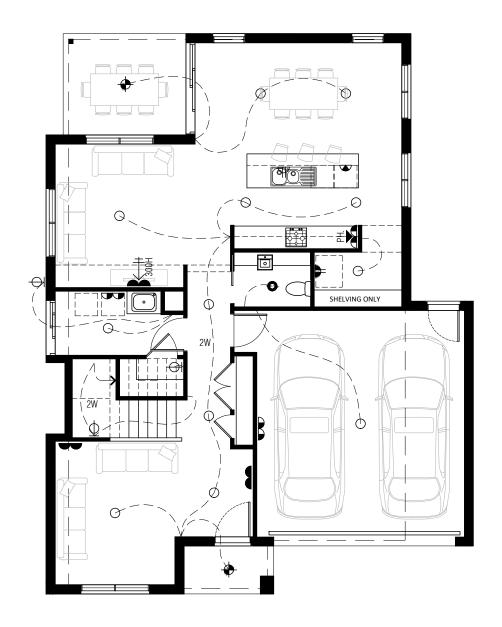

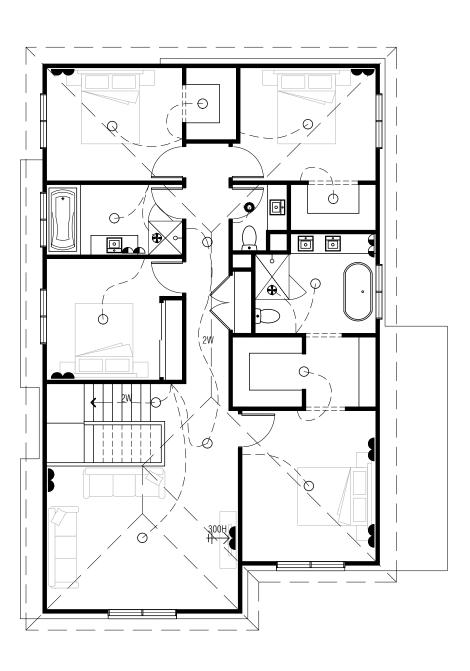

CAMDEN 29

\circ	CEILING LIGHT OUTLET WITH ACRYLIC SHADE.				
P	PENDANT LIGHT AS SPEC.				
	CEILING LIGHT WITH SPEC. FITTING.				
•	LED (FIXED) DOWNLIGHT.				
Ю	WALL LIGHT AS SPEC		PARAFLOOD WITH SENSOR.		
ST	STAIR LIGHT		LED STRIP LIGHT		
1	DOUBLE PARAFLOOD LIGHT W	/ITH SENSOR.			
	1200 FLURO.	JB	JUNCTION BOX (IN CEILING)		
₩	MOTION SENSOR.	∢DLS	DAYLIGHT SENSOR.		
1	EXHAUST FAN (SELF SEALING). INSTALLED A TO COMPLY	AS PER B.C.A. 3.8.5. & WITH A.S.1668.2.		
•	COMBINATION EXHAUST FAN & LIGHT.				
DIM	DIMMER SWITCH TO FITTING AS WIRED.				
2W	TWO WAY SWITCHING TO FITT	TING AS WIRE).		
POWER					
	DOUBLE POWER POINT @ 300MM. UNLESS NOTED OTHERWISE				
A	SINGLE POWER POINT @ 750MM.				
	DOUBLE POWER POINT @ 1150MM.				
	DOUBLE POWER POINT @ 1400MM.				
WP 🔼	SGL WEATHER PROOF P.POINT @ 1150MM.				
WP 🔼	DOUBLE WEATHER PROOF P.POINT @ 1150MM.				
Ж	SGL P.POINT @ 600MM ON SEP. CIRCUIT.				
7⊊{	SGL P.POINT TO CEIL-REMOTE CONT. UNIT				
	SINGLE POWER POINT @ 1800MM.				
OTHER					
S.A.	SMOKE DETECTOR. APPROX. POSITION INSTALLED AS PER B.C.A. 3.7.2. & TO COMPLY WITH A.S.3786.				
GP 🕱	GAS BAYONET POINT @ 450mm				
M/B	EXTERNAL METER BOX.	S/B	INTERNAL SWITCHBOARD.		
HWU	HOT WATER UNIT AS		SOLAR HOT WATER UNIT A		
[HWO]	SPECIFIED	(HWU)	SPECIFIED		
MH	ROOF ACCESS (450 x 600mm)			
SECURITY &	COMMUNICATIONS				
(\$)	SPEAKER (IN CEILING)	CONDUIT	ELECTRICAL CONDUIT		
300H	TV POINT @ SPECIFIED				
\mapsto	HEIGHT				
PH.	TELEPHONE POINT TO MATCH	ADJOINING P	OWER POINT HEIGHT		
MMP	MULTIMEDIA POINT TO MATCI	H ADJOINING I	POWER POINT HEIGHT		
T-B0X	TERMINATION BOX	D-HUB	DISTRIBUTION HUB BOX		
ALARM					
K⊳	ALARM KEYPAD	AS	ALARM STROBE & SIREN		
ACP	ALARM CONTROL PANEL W/-	SINGLE GPO (2200MM AFL		
sD	ALARM SENSOR (TYPICALLY V				
HEATING & (COOLING		,		
®	CEILING REGISTER (HEATING ONLY)	HTR	GAS DUCTED HEATING UNIT		
	CEILING REGISTER (COOLING ONLY)	ECU	EVAP. COOLER UNIT		
	ELECTRIC WALL HEATING PANEL				
_			DETUDNI AID		
A RA	RETURN AIR (WALL MOUNTED)	RA	RETURN AIR (CEILING MOUNTED)		
AC-HEAD	AIR CONDITIONER HEAD	AC - CON	AIR CONDITIONER CONDENSER		
\rightarrow	CEILING FAN WITHOUT		CEILING FAN WITH		

- IMPORTANT:
 PROVIDE LIGHT POINT & SINGLE G.P.O. IN ROOF SPACE
- WHERE INSTALLED, PROVIDE DIRECT POWER OUTLETS TO COOK TOP, RANGEHOOD, UNDER BENCH OVEN.

www.siennahomes.com.au